
Smart Plug

SUN-SMART-PLUG01-F

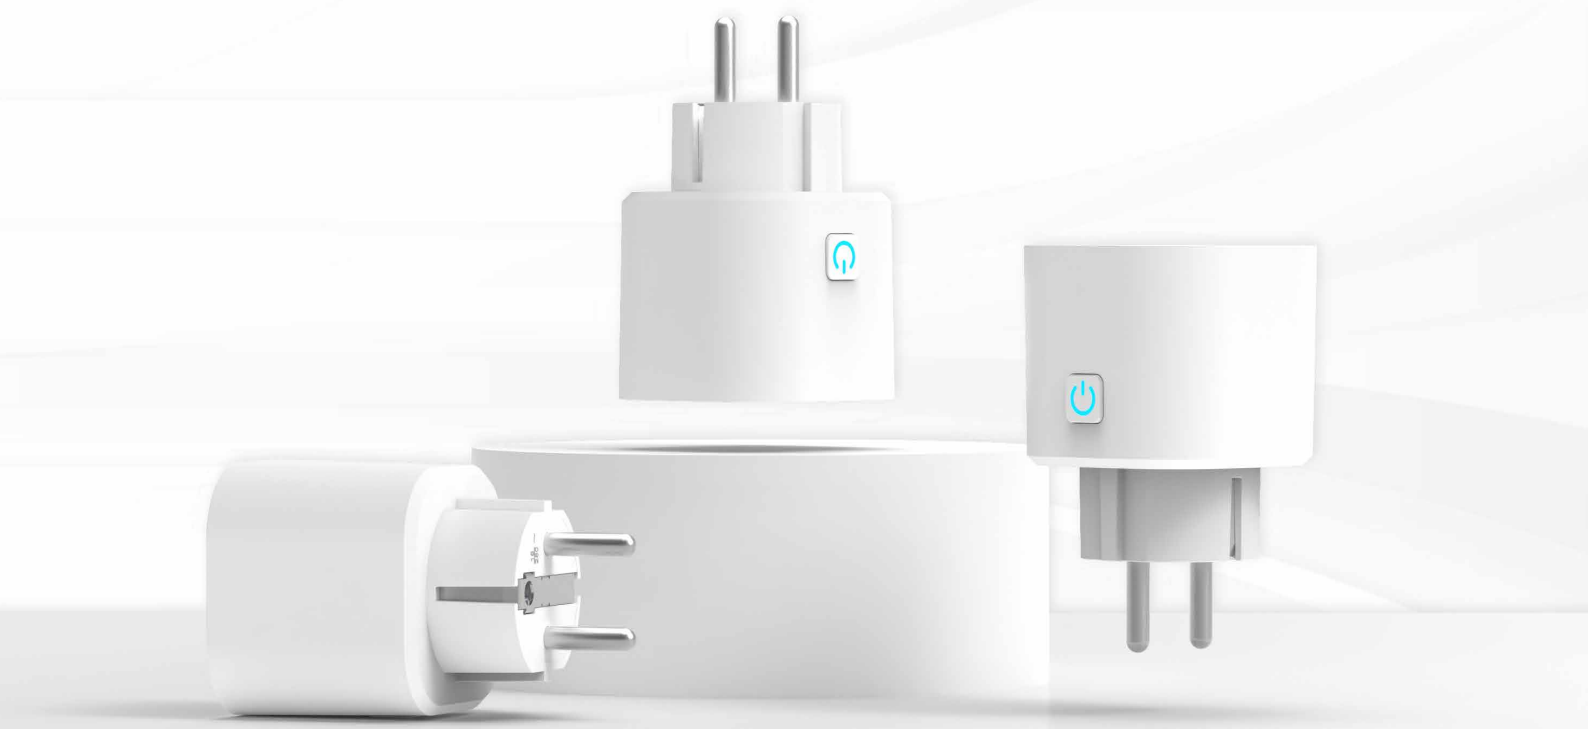

Easy Setup

- Plug in to instantly make devices smart

Comprehensive Protection

- Class I protection and multiple electrical safeguards
- Flame-retardant housing

Smart Energy Management

- Custom strategies by time, SOC & grid status
- Real-time power monitoring and control via Deye Cloud
- Easily define critical and non-critical loads

LoRa Communication

- low latency
- Long-range communication
- Offline operation

Technical Data

Model	SUN-SMART-PLUG01-F
Electrical Parameters	
Rated voltage	220-250Va.c.
Maximum current	16Aa.c.
Frequency and Range	50Hz(45Hz-55Hz)/60Hz(55Hz-65Hz)
Connection	Plug-type
Communication	
Communication Model	LoRa
Lora Communication Distance	≈200m(Barrier free)
Basic Parameters	
Working Temperature Range	-40 to +60℃
Allow Environmental Humidity	0-95%RH
Ingress Protection(IP) Rating	IP20
Protection Level	CLASS I
Allowable Altitude	≤3000m
Product size (WxHxD)	51.2x51.2x64mm
Weight	0.08kg
Warranty	5 Years
Standard	VDE 0620-2-1;EN 61058
LoRa Parameters	
Frequency Range	863MHz-870MHz
Antenna	Internal antenna
Antenna Gain	0.3.23dBi@868MHz

Ningbo Deye Inverter Technology Co., Ltd.
Address: No. 26 South YongJiang Road, Daqi, Beilun, NingBo, Zhejiang, China. | Tel: +86 (0)574 86228841 | E-mail: market@deye.com.cn

deye.shop

Поддержка на русском — deye.shop

Официальный дилер Deye в России — ООО «НТ»

Мы отвечаем на русском языке по любому оборудованию Deye из этого документа.

- Подберём инвертор и аккумуляторы под ваш дом или объект.
- Ответим на вопросы по монтажу, настройке и кодам ошибок.
- Поможем с гарантийным обращением.

Телефон	8 (800) 201-76-60, звонок по России бесплатный
Техническая поддержка	support@deye.shop
Заказы и счета	zakaz@deye.shop
Сайт	deye.shop

На сайте — документы на русском, цены с НДС и наличие на складах в Ростове-на-Дону, Подмосковье и Краснодаре. Работаем в будни с 9:00 до 18:00 по Москве.